


User Manual CHM Data Viewer

· a passion for precision · passion pour la précision · pasión por la precisión · passione per la precisione · a



www.lufft.com

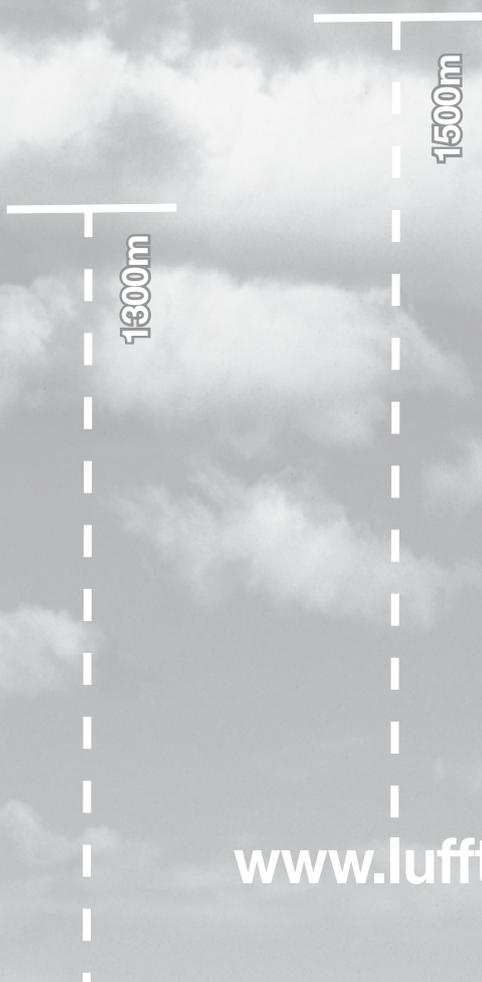

G. Lufft Mess- und Regeltechnik GmbH

Fellbach Office:

Gutenbergstraße 20

D-70736 Fellbach

Phone: +49 711 51822-0

Fax: +49 711 51822-41

www.lufft.com

info@lufft.de

Berlin Office:

Carl-Scheele-Straße 16

D-12489 Berlin

Phone: +49 711 51822-831

Fax: +49 711 51822-944

Press date: 22nd April 2016

Revision number: 1.4

Note

No part of this manual may be reproduced in any form (print, photocopy, micro film or any other procedure) without prior written permission of G. Lufft Mess- und Regeltechnik GmbH, nor may contents be used, reproduced, processed or distributed using electronic systems. This manual was produced with the appropriate care. No liability will be accepted for damage resulting from the use of the contents, and any errors or omission contained herein.

We reserve the right to modify the document.

CHM Data Viewer

User Manual

Contents

1	Installation	4
2	First start	4
3	Extending licenses	5
4	Program description	6
4.1	Command line parameters	6
4.2	Configuration file (settings.ini)	6
4.3	Folder structure of NetCDF files	7
4.4	Menu bar	7
4.4.1	File menu	7
4.4.2	Options menu and Options dialog	8
4.4.3	About menu	10
4.5	Main window	10
4.5.1	2D Data	11
4.5.2	1D Data	12
4.5.3	Status	14
4.5.4	Information	15
4.6	Status bar	15
4.7	Data plots	16
4.7.1	Dialog	16
4.7.2	Axes area	16
4.7.3	Data area	17

1 Installation

Unpack the `chmviewer.zip` in a folder with writing permissions for the end user. A folder `ChmDataViewer` will be created, containing the viewer executable `chmviewer.exe`.

2 First start

When starting for the first time, the program asks for the eight-digit key number you obtained from G. Lufft Mess- und Regeltechnik GmbH and a name for your CHM device.



If the input is correct, the `Options` dialog opens to let you specify `Overlap` and `NetCDF` paths. The `Overlap` path specifies a folder containing corrective functions (`TUB*_4096.cfg`) for your laser optical units. The corrective functions of all laser optical units can share a folder. The `NetCDF` path specifies the default folder for the `NetCDF` data file selection dialog in case the program is started without a `NetCDF` file parameter.

After adjusting options, see [section 4.4.2](#), you can save them to avoid re-setting at each program start.

After finishing the `Options` dialog by selecting the `Ok` button, the `NetCDF` file selection dialog opens to let you select the `NetCDF` file you wish to examine in `CHM Data Viewer`.

In case your `chmviewer.exe` is too old when you enter your key at program start you will be asked to contact G. Lufft Mess- und Regeltechnik GmbH by e-mail to obtain an updated key to unlock the program, see [section 3](#).


3 Extending licenses

Licenses to run the program are time-limited. Once per year you need to re-activate your license from G. Lufft Mess- und Regeltechnik GmbH. The expiry date is visible in the About license item of the About menu. Beginning at 30 days before expiry, the License request dialog will be shown at program start. The dialog allows you to extend your license free of charge for another year.

After a license has expired, the program needs to be unlocked again to be used.

In case no e-mail application opens after using the Send request by e-mail button, or if the generated e-mail does not contain an attachment, please use the Save request to file button and send the generated file `chmviewer-keyrequest-yyyymmdd` to `support@lufft.de`.

You will receive a response containing the file `chmviewer-keyanswer-yyyymmdd`. This file can be used in the License request dialog, Insert new license key to unlock the program.

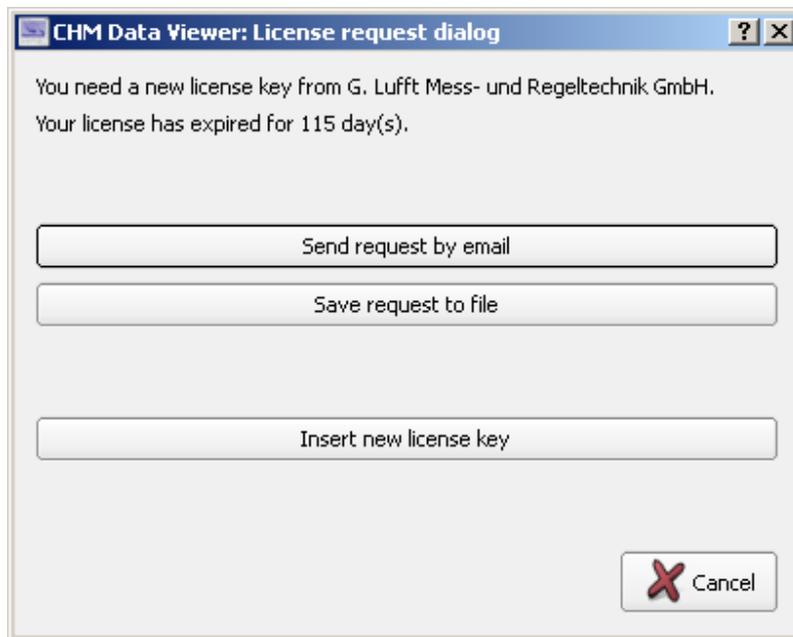

4 Program description

4.1 Command line parameters

The program can be started from a command shell using the following optional parameters:

`-c <config file>` defines a configuration file that will be used instead of the default configuration file `settings.ini`.

`-o <overlap file>` defines an alternative overlap correction function file that will be used instead of the automatically chosen overlap correction file to display the backscatter signals on the 2D Data tab, see [section 4.4.2](#).

`<netcdf file>` defines a NetCDF file to view. This also prevents the NetCDF file selection dialog from being shown.

The CHM Data Viewer can be used to open NetCDF files in some file managers (e.g. Windows Explorer) by dragging a NetCDF file to `chmviewer.exe`.

4.2 Configuration file (`settings.ini`)

At program start, the `*.ini` configuration file passed with the `-c` command line option is read. If no such file was specified, the file `settings.ini` in the folder containing `chmviewer.exe` will be used instead. If this file does not exist, a dialog asking to specify a configuration file, or to use the Options dialog will be shown.

A valid configuration file might look as follows:

```
[file_settings]
overlap_path=C:\\Lufft\\CHM\\Overlap
netcdf_path=C:\\Lufft\\CHM\\Measure\\CHM090104\\2013\\06
time_period_in_h=48
time_tolerance_in_s=300
show_one_file=true
memory_limit_in_MB=250
collection_file=C:\\Temp\\collection.pdf

[misc]
bind_plots=true
1d_customer\\size=3
1d_customer\\1\\nc_variable=prf_kHz
1d_customer\\2\\nc_variable=temp_int
1d_customer\\3\\nc_variable=state_optics

[plot_settings]
colormap=Custom
color_stops\\1\\pos=0.4
```

```
color_stops\1\color=#6f8a0e
color_stops\2\pos=1
color_stops\2\color=#aa00ff
color_stops\size=2
```

The settings in the [plot_settings] section relate to the colors used in the 2D-Data tab. They can be changed and saved using the Plot dialog, section Colormap.

Most of the parameters can be changed and saved using the Options dialog, see [section 4.4.2](#). Others, like collection_file, are handled in the Collection dialog (Menu File, Create collection...).

Saving the settings in the Options dialog also saves the current plot_settings into the configuration file. The colormap setting specifies the used color palette. The color_stops values refer to the colors in the Custom color palette.

The individual settings are described in more detail in [section 4.4.2](#).

4.3 Folder structure of NetCDF files

When opening a NetCDF file a list of all NetCDF files of the same device will be created. The search will be performed recursively, with the maximum recursion depth depending on actual folder structure.

If the selected NetCDF file is located in a folder hierarchy with yearly and monthly subfolders, or only yearly subfolders, matching the patterns path/yyyy/MM/*.nc or path/yyyy/*.nc, the folder path and all of its subfolders will be searched for NetCDF files of the same device. In order to minimize program startup time it is advisable to keep only NetCDF files belonging to a single device under path.

If the folder structure does not match the mentioned patterns, only the folder containing the currently opened NetCDF file will be searched, without recursing into any subfolders.

4.4 Menu bar

4.4.1 File menu


The File menu contains three entries.

Open NetCDF file... opens a new NetCDF file using a standard file selection dialog. NetCDF files of the same device located in the same path can also be opened using the combo box in the status bar, see [section 4.6](#).

Reload NetCDF file reads the current NetCDF file again. The records of the current NetCDF file will be removed from the memory and then re-read from the file. As a result, data which are newly added after the program start to the NetCDF file can be reloaded.

Create collection... opens a dialog for the creation of a PDF document with colored signal plots of selected NetCDF files. The items Current month and Current year in the dialog save all data plots belonging to the current month or year, respectively, of the current

NetCDF file. Using the `Custom` button, NetCDF files can be selected using a file dialog. The `Output file` input field specifies the name or full path of the generated PDF document.

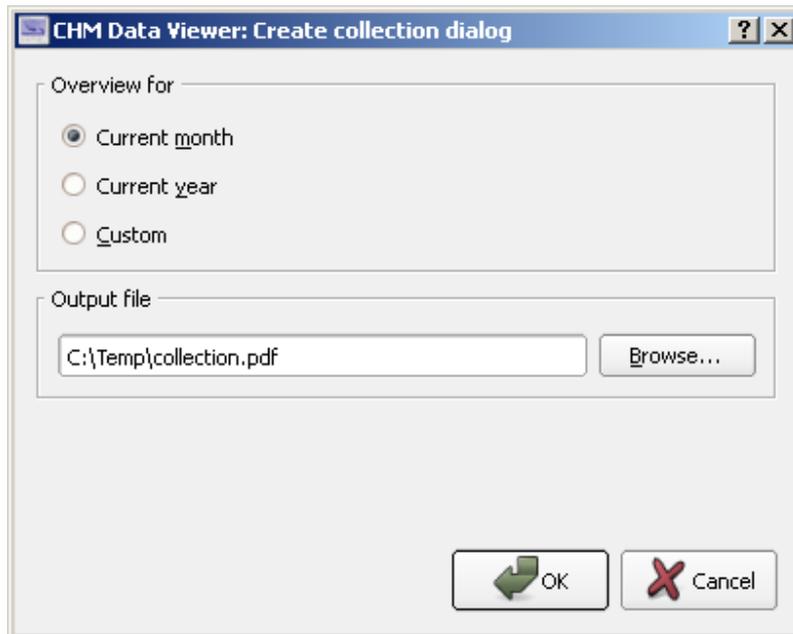

The name of the generated output file is stored in the configuration file when saving the program settings using the `Options` dialog, and read back when reading the configuration file, see `collection_file`.

`Exit` exits the program.


4.4.2 Options menu and Options dialog

Using the `Options` menu the `Options` dialog can be opened. In the `Options` dialog values of the current configuration file can be displayed, edited and saved or setting from other configuration files be loaded.

Time period (`time_period_in_h`) This value specifies the number of hours for which data will be examined, ranging backwards from the last entry in the selected NetCDF file, possibly restricted by the amount of the available memory.

One file (`show_one_file`) If this option is selected, only the current NetCDF file will be displayed, independent of the `time_period_in_h` setting.

Overlap path (`overlap_path`) The overlap path specifies a folder containing overlap correction function files for your laser optical units. The functions of all laser optical units can be located in the same folder. You obtain the overlap correction function files (`TUB*_4096.cfg`) for your measuring units from G. Lufft Mess- und Regeltechnik GmbH.

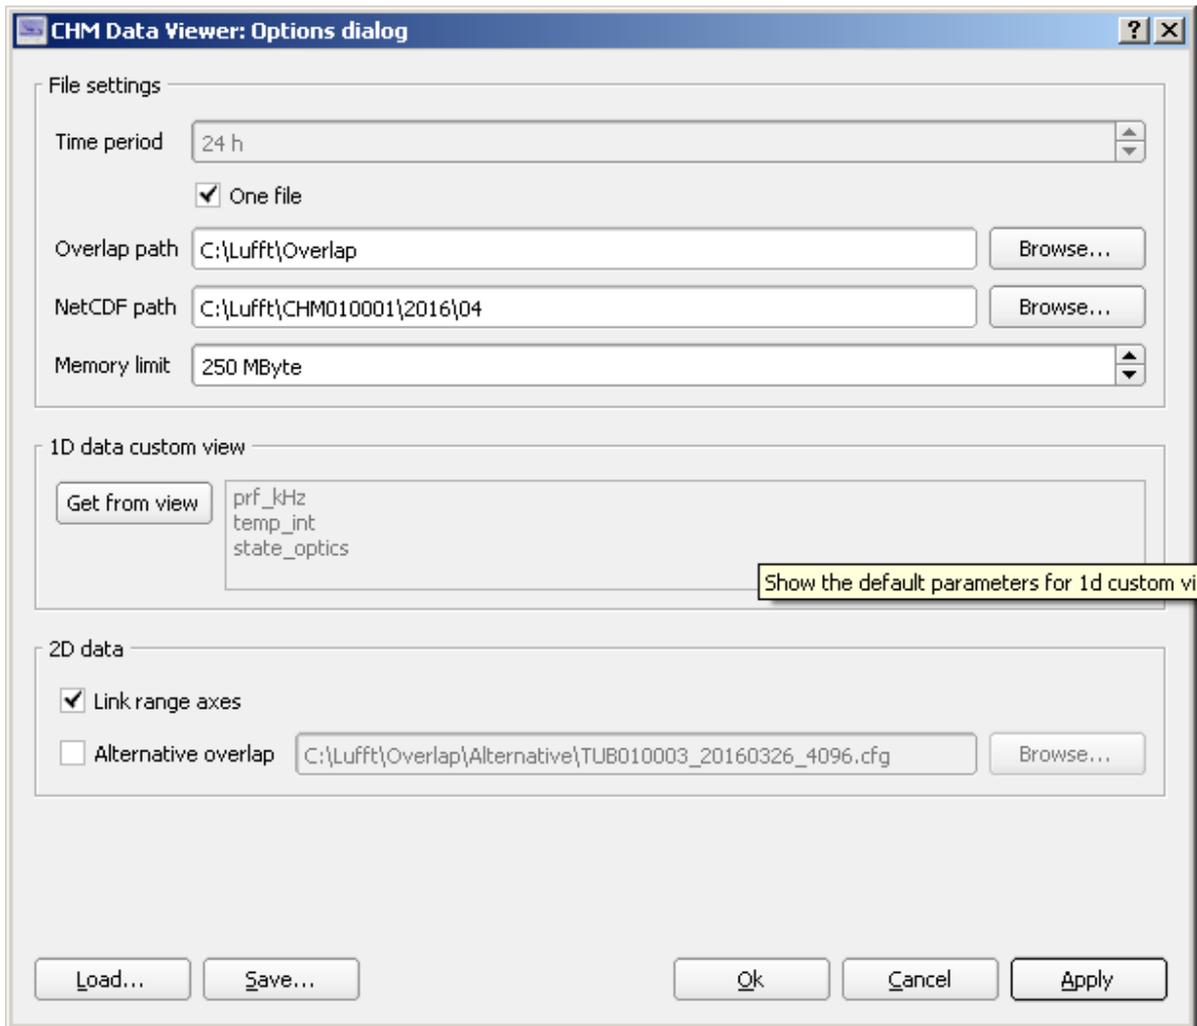

If for a measuring unit used in a NetCDF file no overlap correction function is available, no overlap correction/reverse correction will be performed. This is equivalent to using an overlap correction function with a constant value of 1.

NetCDF path (`netcdf_path`) If at program start no NetCDF file is given as parameter, a file selection dialog to specify a NetCDF file is opened, starting in the folder specified with `netcdf_path`.

Memory limit (`memory_limit_in_MB`) The program caches data read from the NetCDF file to allow quick switching between records. The value `memory_limit_in_MB` specifies how many MB of NetCDF data will be buffered. In case the limit reached, the least-recent used record will be dropped from the cache. This can lead to a displayed time period smaller than specified by `time_period_in_h`. Only NetCDF data is counted towards the specified limit, not memory or auxiliary data otherwise used by the program.

1D data custom view (`1d_customer`) A user defined 1D view can be shown by choosing the `Custom` entry of the combo box in the `1D Data` tab of the main window. This view allows the selection and plotting of up to five 1D data fields. The list of selected variable can be saved through the `Options Dialog` after fetching it from the view using the `Get from view` button.

Link Y axes (`bind_plots`) If this option is selected, the height axes of the colored signal plot and the profile plot in the `2D Data` tab will be kept synchronized. If the height range in one of the view is changed manually, the other is adjusted automatically such that both views always show the same height range.

Alternative overlap This field allows the specification of an file containing an overlap correction function which will be used instead of the default overlap correction function when displaying backscatter signals in the `2D Data` tab.

This option is only available when a default overlap correction function for the current NetCDF data file has been found. The default overlap correction function is selected automatically by the program, depending on the `overlap_path` of the measurement unit and the NetCDF file.

The alternative overlap correction function settings are not saved in the configuration file. If the program should use an alternative overlap from startup, the `-o` command line options can be used, see [section 4.1](#)

When opening NetCDF files belonging to an device different to the current one, this option is will be deactivated, and needs to be re-enabled manually next time it is wanted.


4.4.3 About menu

The `About` menu contains information about the program, the license, and the expiry date of the license.

4.5 Main window

The main window contains views in four tabs to display the measurement data and device characteristics stored in NetCDF files. The views are named `2D Data`, `1D Data`, `Status` and `Information`.

4.5.1 2D Data

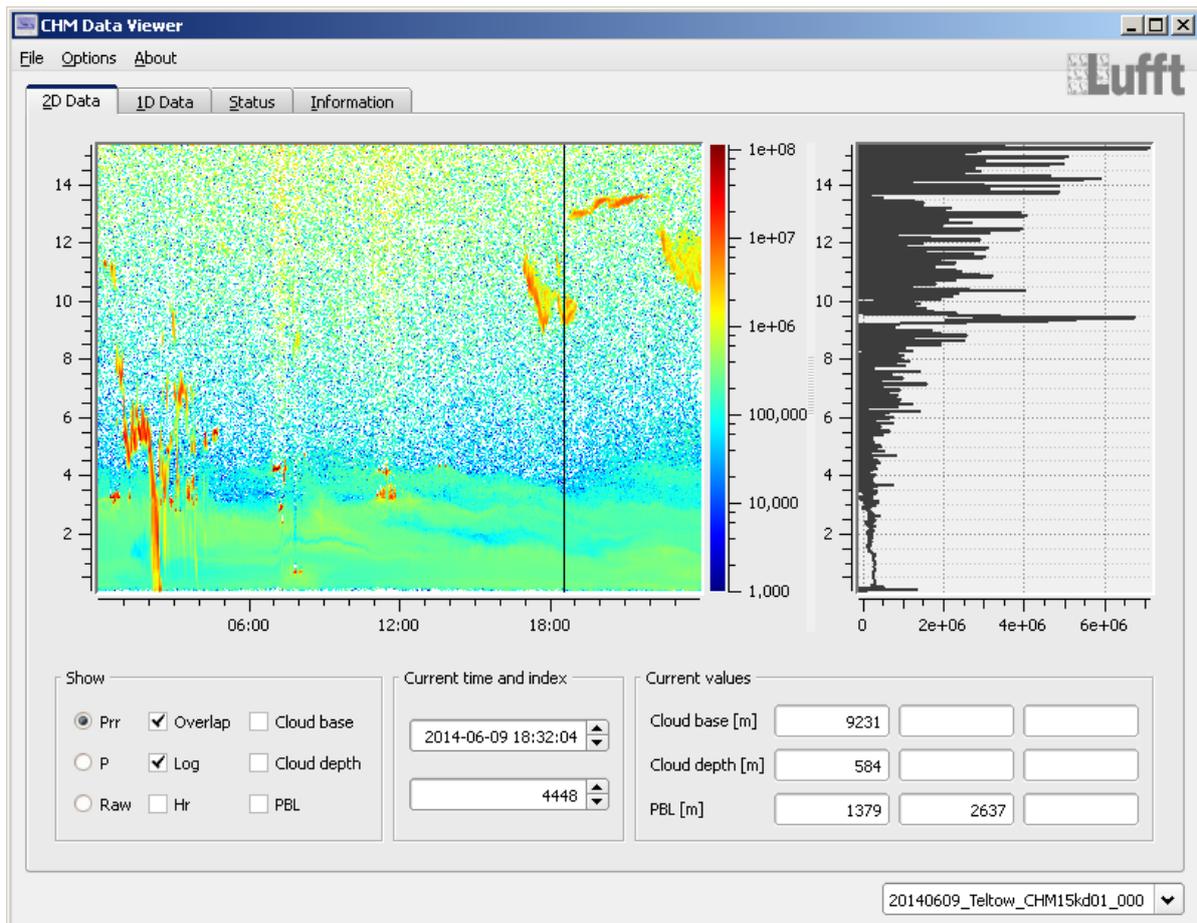

The 2D Data tab displays the backscatter signal. On the left, the signal intensity is displayed in a colored plot, ranging over time and height in km. The switches in the first two columns of the Show group control the processing level of the backscatter data. If Prr is selected, the normalized and range-corrected signal is displayed. If P is selected, the normalized signal is displayed without range correction. If Raw is selected, the laser shot-corrected raw data is shown.

The Overlap switch determines whether the signal will be displayed with or without overlap correction. The Log switch selects a logarithmic intensity scale. The switch log is automatically turned off, if the to displayed signal contains no positive values. If Hr is selected, the high-resolution data of the lower height interval (beta_raw_hr instead of beta_raw, available only with firmware > 0.700) will be displayed.

The plot on the right side displays the signal profile at the current time index. The time index can be changed by dragging the black line in the plot, or by double-clicking at the desired position. Alternatively, the time index can be adjusted using the input fields in the Current time and index group.

The switches described above always affect both plots. If this is unwanted, e.g. when using the logarithmic view, the scales can be adjusted individually using the Plot Dialogs of the respective plots, see section 4.7.1.

The remaining three switches in the `Show` group govern the visibility of the cloud bases (`Cloud base`), the penetration depths (`Cloud depth`) and the aerosol layers (`PBL`) in both plots. The height values of the selected items are shown as horizontal lines with the width of the corresponding time entry in the colored signal plot, and as horizontal lines spanning the whole x range in the profile plot. If both cloud bases and penetration depths are selected, their values are displayed as rectangles.

In the `Current values` group, cloud bases, penetration depths and aerosol layers belonging to the current time index (`Current time and index`) are shown.


In case older NetCDF files without `beta_raw_hr` data are visualized, the `Hr` switch is deactivated. The same holds true for files without clouds or aerosol layers.

If there is no overlap correction function file for the laser optical unit found in the `overlap-path`, the `Raw` and `Overlap` switches are deactivated, too.

The option `Link Y axes` controls whether the height axes of the colored signal plot and the profile plots are kept synchronized, see [section 4.4.2](#).

The height axes of the plots are determined from the range vector, the zenith angle (`zenith`), and the cloud height offset (`cho`) stored in the NetCDF file. It is not necessarily the same as the distance of the signal event from the device.

4.5.2 1D Data

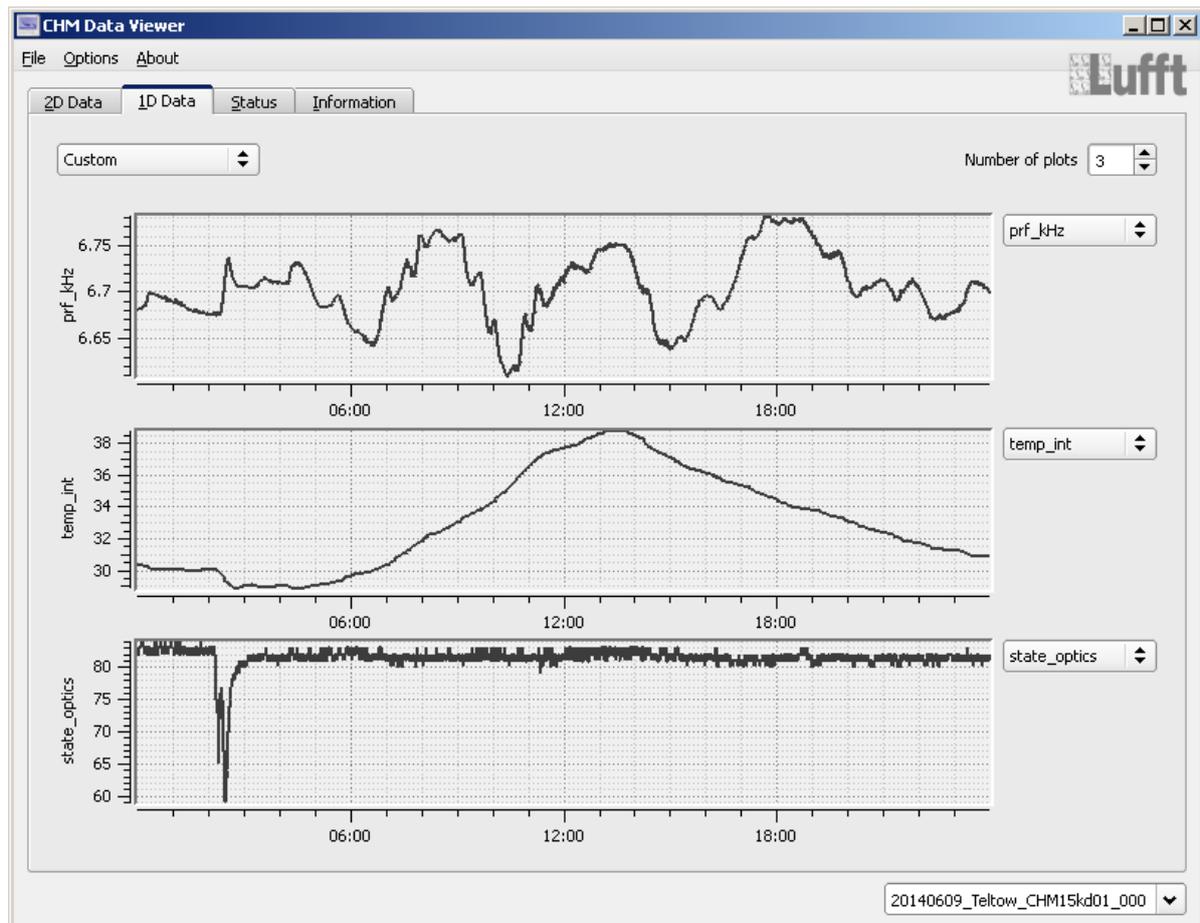

The 1D Data tab displays one-dimensional time-dependent variables from the NetCDF file. The combo box in the upper left corner selects one of the four following predefined scenarios:

Temperature

Visualizes the four temperature variables of the NetCDF file (`temp_ext`, `temp_int`, `temp_lom`, `temp_det`).

States

Visualized the three quality states of the optical unit, the detector and the laser (`state_optics`, `state_detector`, `state_laser`).

Baseline, Stddev, Pcalc

Visualizes the variables `base`, `stddev` und `p_calc`.

User defined


Visualizes up to five variables. The number of variables is selected in the `Number of plots` box in the upper right corner. Next to each plot there is a combo box to select the variable visualized in the plot. The standard NetCD format (firmware version > 0.700) contains the following 26 variables that can be used in the plots:

<code>average_time</code>	Time over which measurement data is averaged
<code>base</code>	Baseline height of the raw signal in photons per laser shot, mainly influenced by day light
<code>bcc</code>	Cloud amount in the lowest cloud layer
<code>error_ext</code>	Standard status bit sequence (31 bit service code)
<code>laser_pulses</code>	Laser pulse count during the measurement interval
<code>life_time</code>	Laser operating time in hours
<code>mxd</code>	Maximum detection range
<code>nn1, nn2, nn3</code>	Vendor defined fields
<code>p_calc</code>	Calibration pulse to normalize the individual unit over time
<code>prf_kHz</code>	Pulse repetition frequency of the laser
<code>sci</code>	Sky condition index (precipitation, fog ...)
<code>state_detector</code>	Receiver quality in percent
<code>state_laser</code>	Laser quality in percent
<code>state_optics</code>	Quality of the optical unit in percent (glass stain)
<code>stddev</code>	Standard deviation of the raw signal in photons per laser shot
<code>tcc</code>	Total degree of coverage
<code>temp_det</code>	Receiver temperature in degree Celsius
<code>temp_ext</code>	Outer casing temperature in degree Celsius
<code>temp_int</code>	Inner casing temperature in degree Celsius
<code>temp_lom</code>	Temperature of laser optical module in degree Celsius
<code>time</code>	End time of measurement (UTC)
<code>time_diff</code>	Difference between neighboring measurements in seconds
<code>voe</code>	Impreciseness of vertical visual range
<code>vor</code>	Vertical visual range

The currently active variables of the `Custom` view are listed in the Options dialog and can be saved to the configuration file from there.

The time axes of the visible plots are kept synchronized.

4.5.3 Status

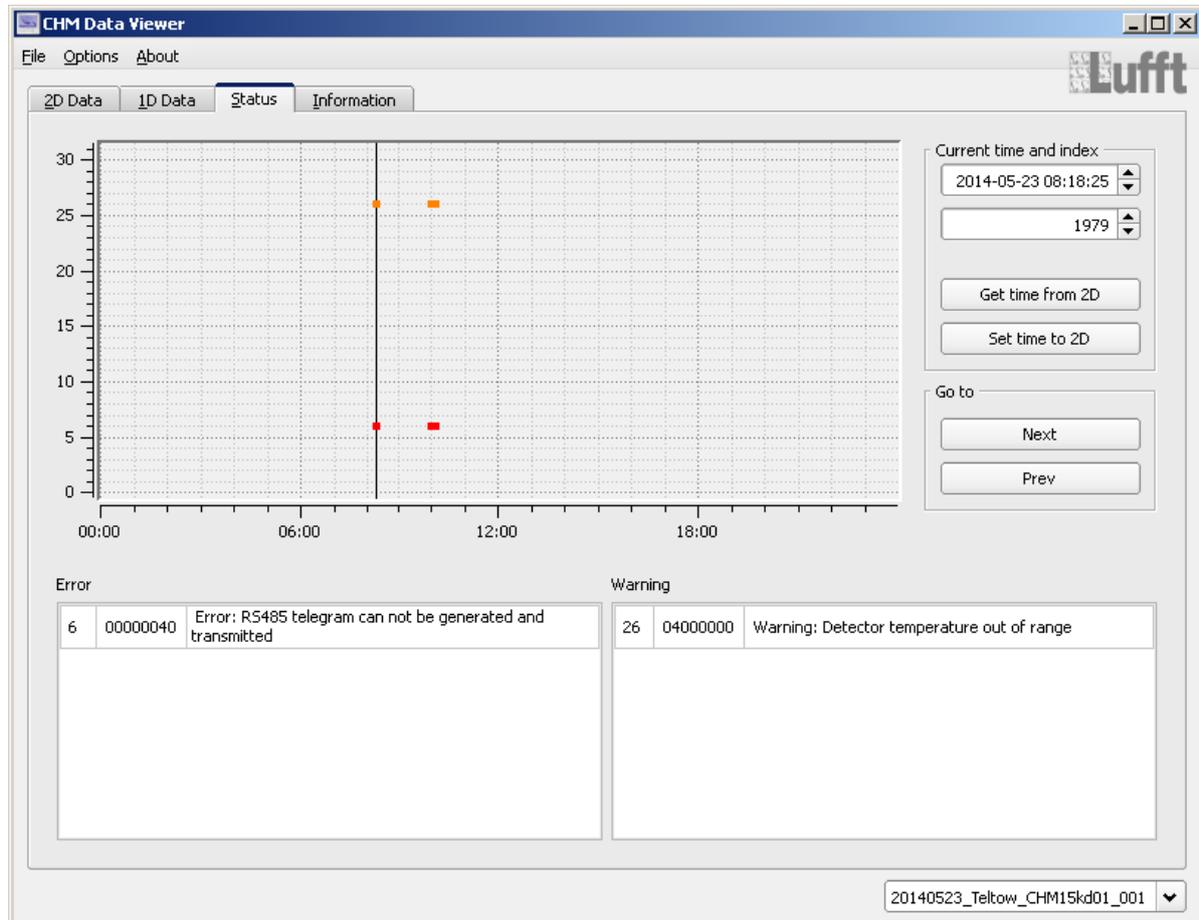


In the `Status` tab, the 31 bit status codes are visualized. In the time raster plot all bits set in the status code are shown as solid lines, error bits are red, warnings orange. The two tables in the lower part display the set error and warnings bits at the current time index, respectively. The current time index can be changed using the black link in the plot or the `Current time and index` input fields.

To examine the impact of errors on signal data, the buttons `Get time from 2D` and `Set time to 2D` can be used to copy the current time index between the `Status` and the `2D Data` views.

The buttons in the `Go to` group can be used to navigate to the next, or previous time index with different status bit combinations. This simplifies scrolling through error events and reduces the risk to miss changes.

4.5.4 Information

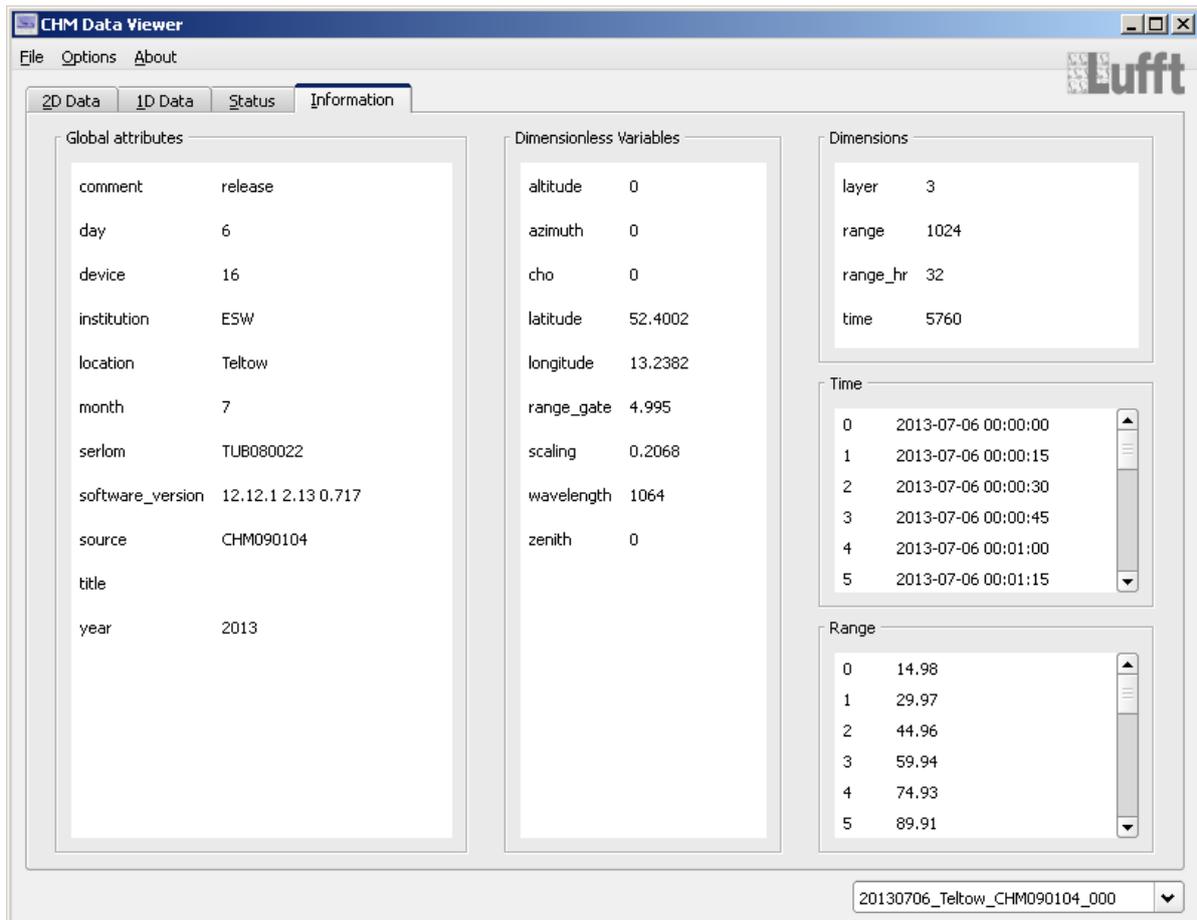

The `Information` tab shows tables of global attributes, dimensionless variables, dimensions with values, and time and range vectors of the NetCDF file selected in the status bar combo box, see [section 4.6](#).

4.6 Status bar


The `Status bar` is located in the lower part of the main application window. The `Status bar` displays status messages and contains a combo box for the selection of NetCDF file. The combo box displays the name of the current NetCDF file and can be used to select one of the NetCDF files found for the device (see [section 4.3](#)). Scrolling up in the box using the mouse wheel selects the previous NetCDF file from the list, scrolling down selects the next. By editing the file name in the combo box any other NetCDF file of the device can be selected.

4.7 Data plots

All data plots in the program are interactive, allowing e.g. zooming or panning using the mouse. Each view has a Plot dialog to adjust axes and color palettes, to print, to save, etc.

4.7.1 Dialog

The options dialog can be opened by Ctrl - right click on the plot. If the mouse cursor is close to the plot axes, a simple right click suffices.

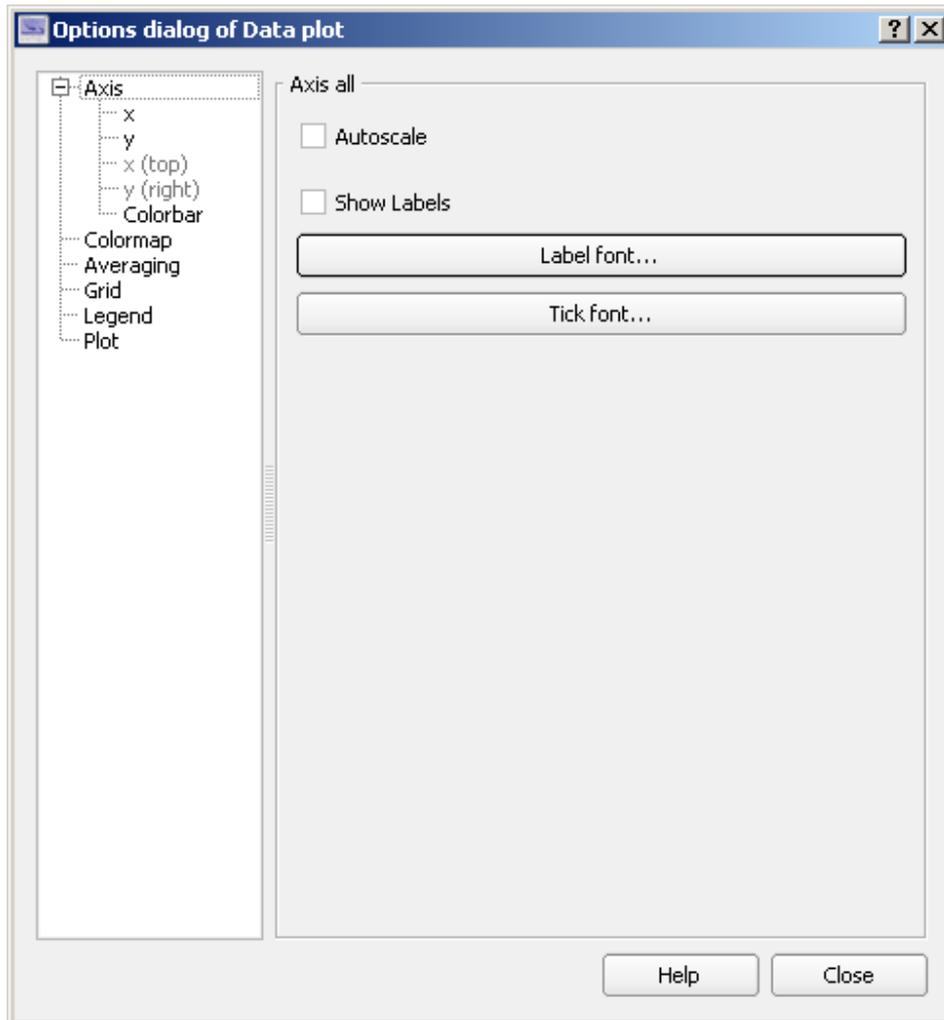

4.7.2 Axes area

If mouse cursor is near one of the plot axes, the following actions are available:

right mouse button	open plot dialog
Ctrl - right mouse button	open plot dialog

4.7.3 Data area

If the mouse cursor is inside the data area, the following actions are available:

left mouse button	Show position, select zoom area, select index
press	activate position display
hold and drag	update coordinates
release	start zoom area selection
press again	end zoom area selection, and zoom
click on line, drag	move index selection (optional)
double click	set index to cursor position (optional)
right mouse button	Zoom
click (while zooming)	cancel zoom area selection
click	undo one zoom step
Shift - click	redo one zoom step
Alt - click	show initial zoom area
Ctrl - click	open plot dialog
middle mouse button	Pan
press and drag	pan visible area
mouse wheel	Zoom
up	zoom out
down	zoom in

In case of further questions do not hesitate to contact: support@lufft.de.

**G. LUFFT Mess- und
Regeltechnik GmbH**

Lufft Germany:

Fellbach Office:

Postal Address:

Gutenbergstrasse 20

D-70736 Fellbach

Address:

P.O. Box 4252

70719 Fellbach

Germany

Phone: +49 (0)711 51822-0

Fax: +49 (0)711 51822-41

www.lufft.com

info@lufft.de

Berlin Office:

Carl-Scheele-Strasse 16

12489 Berlin

Germany

Phone: +49 711 51822-831

Fax: +49 711 51822-944

a passion for precision · passion pour la précision · pasión por la precisión · passione per la precisione ·

Lufft North America:

Lufft USA, Inc.

1110 Eugenia Pl Unit B

Carpinteria, CA 93013

Phone: +01 888 519 8443

Fax: +01 805 845 4275

E-Mail: sales@lufftusainc.com

www.lufft.com

Lufft China:

Shanghai Office:

Measurement & Control

Technology Co., Ltd.

Room 507 & 509, Building No.3,

Shanghai Yinshi Science and Busi-

ness Park,

No. 2568 Gudai Road,

Minhang District,

201199 Shanghai, CHINA

Phone: +86 21 5437 0890

Fax: +86 21 5437 0910

E-Mail: china@lufft.com

www.lufft.cn

